
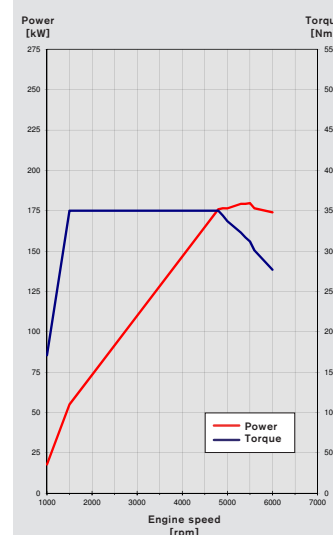
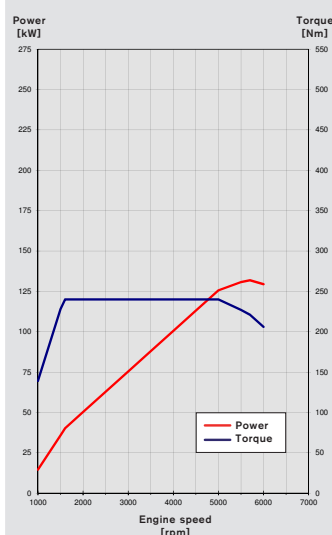


ENGINES

	T4 (B4164T)	T4F (B4164T2)	T5 (B4204T11)
Type	In-line 4-cyl. turbo petrol	In-line 4-cyl. turbo petrol	In-line 4-cyl. turbo petrol
Configuration	Transverse, front wheel drive	Transverse, front wheel drive	Transverse, front wheel drive
Displacement, cm ³	1596	1596	1969
Bore (mm)	79.0	79.0	82.0
Stroke (mm)	81.4	81.4	93.2
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	10.0:1	10.0:1	10.8:1
Valves, no/cylinder	4	4	4
Camshafts	2	2	2
Engine management system	Integrated fuel (SFI)/ignition control systems	Integrated fuel (SFI)/ignition control systems	Integrated fuel (SFI)/ignition control systems
Ignition sequence	1 - 3 - 4 - 2	1 - 3 - 4 - 2	1 - 3 - 4 - 2
Engine idling speed, rpm	750	750	875-950
Fuel, rec. octane	91-98 RON	E85 & 91-98 RON	91-98 RON
Max output, kW (hp)/rpm	132 (180)/5700	132 (180)/5700	180 (245)/5500
Max torque, Nm/rpm	240/1600-5000	240/1600-5000	350/1500-4800

POWER AND TORQUE →

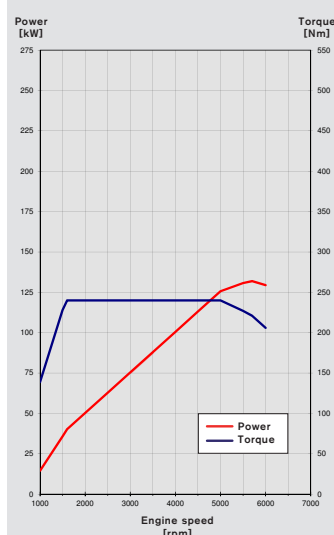

Manual gearbox/final drive	MMT6 Z3	3.690/2.680	MMT6 Z3	3.690/2.680	
Automatic gearbox/final drive	MPS6-7	3.933/2.682	MPS6-7	3.933/2.682	AW TG-81SC 2.774
PERFORMANCE					
Gearbox	Manual	Automatic	Manual (E85)	Automatic (E85)	Automatic
Acceleration, 0-100 km/h (sec)	8.7	9.9	8.7	9.9	6.7
Top speed, km/h	215	215	215	215	230
Fuel consumption l/100 km (Combined)	6.0	7.2	7.0 (9.6)	7.2 (9.8)	6.4
CO ₂ g/km	139	168	163 (157)	168 (162)	149

TRANSMISSIONS

6-speed manual and automatic gearbox.




6-speed powershift.

8-speed automatic gearbox.

RATIO	AW TF-80SC	AW TG-81SC	M66D F2A	M66W FD	MPS6-4	MPS6-7	MMT6 W3	MMT6 Z3
First	4.148	5.250	3.385	3.385	3.583	3.818	3.583	3.818
Second	2.370	3.029	1.905	1.905	1.952	2.150	1.952	2.150
Third	1.556	1.950	1.194	1.267	1.194	1.407	1.241	1.423
Fourth	1.155	1.457	0.838	0.949	0.842	1.029	0.868	1.029
Fifth	0.859	1.221	0.652	0.775	0.943	1.188	0.943	1.129
Sixth	0.686	1.000	0.540	0.652	0.789	0.971	0.789	0.943
Seventh		0.809						
Eighth		0.673						
Reverse	3.394	4.015	3.200	2.615	4.843	5.284	5.099	5.443

ENGINES	T6 AWD (B6304T4)	D2 (D4162T)	D3 (D5204T7)
Type	In-line 6-cyl. turbo petrol	In-line 4-cyl. turbo diesel	In-line 5-cyl. turbo diesel
Configuration	Transverse, all wheel drive	Transverse, front wheel drive	Transverse, front wheel drive
Displacement, cm³	2953	1560	1984
Bore (mm)	82.0	75.0	81.0
Stroke (mm)	93.2	88.3	77.0
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	9.3:1	16.0:1	16.5:1
Valves, no/cylinder	4	2	4
Camshafts	2	1	2
Engine management system	Integrated fuel (SFI)/ignition control systems	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection
Ignition sequence	1 - 5 - 3 - 6 - 2 - 4	1 - 3 - 4 - 2	1 - 2 - 4 - 5 - 3
Engine idling speed, rpm	590	790	700
Fuel, rec. octane	91–98 RON	Cetane Number: Min 48	Cetane Number: Min 48
Max output, kW (hp)/rpm	224 (304)/5600	84 (115)/3600	100 (136)/3500
Max torque, Nm/rpm	440/2100–4200	270/1750–2500	350/1500–2250

POWER AND TORQUE →

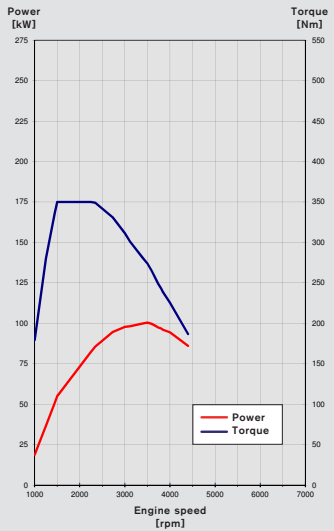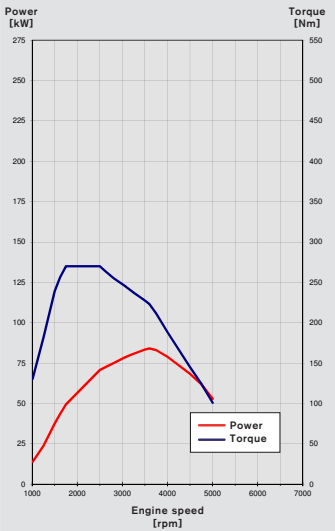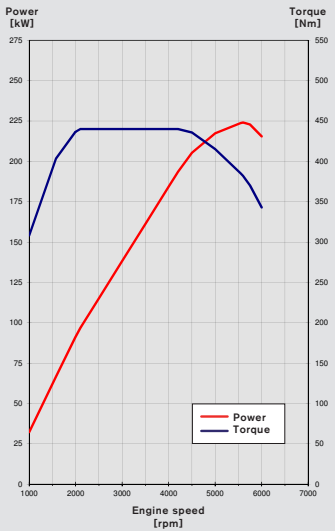

Manual gearbox/final drive			MMT6 W3	4.063/2.955	M66D F2A	3.770
Automatic gearbox/final drive	AW TF-80SC	3.329	MPS6-4	3.933/2.682	AW TF-80SC	3.075
PERFORMANCE						
Gearbox		Automatic	Manual	Automatic	Manual	Automatic
Acceleration, 0–100 km/h (sec)		6.6	11.9	13.2	10.6	10.6
Top speed, km/h		250	190	180	200	195
Fuel consumption l/100 km (Combined)		10.2	4.5/4.2*	4.5/4.2*	4.5	5.1 (4.9**)
CO ₂ g/km		237	119/109*	119/111*	119	134 (130**)

* Restricted offer


** Tire restriction

CHASSIS

Suspension	front	McPherson Strut, Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
	rear	Independent Suspension with Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
Steering		Power Assisted Rack and Pinion Steering
Turning circle, curb to curb, 225" width		11.2 m
Braking system		Antilock Braking System (ABS) with Electronic Brake Distribution (EBD) and Electronic Brake Assistance (EBA)
Braking distance, 100–0 km/h		38 m
Brake disc diameter	front	300 mm/316 mm
	rear	302 mm

ENGINES	D4 (D5204T3)	D4 AWD (D5244T17)	D4 (D4204T5)
Type	In-line 5-cyl.turbo diesel	In-line 5-cyl. turbo diesel	In-line 4-cyl. turbo diesel
Configuration	Transverse, front wheel drive	Transverse, all wheel drive	Transverse, front wheel drive
Displacement, cm³	1984	2400	1969
Bore (mm)	81.0	81.0	82.0
Stroke (mm)	77.0	93.2	93.2
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	16.5:1	16.5:1	15.8:1
Valves, no/cylinder	4	4	4
Camshafts	2	2	2
Engine management system	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection
Ignition sequence	1 - 2 - 4 - 5 - 3	1 - 2 - 4 - 5 - 3	1 - 3 - 4 - 2
Engine idling speed, rpm	700	700	825
Fuel, rec. octane	Cetane Number: Min 48	Cetane Number: Min 48	Cetane Number: Min 48
Max output, kW (hp)/rpm	120 (163)/3500	120 (163)/4000	133 (181)/4250
Max torque, Nm/rpm	400/1500–2750	420/1500–2500	400/1750–2500

POWER AND TORQUE →

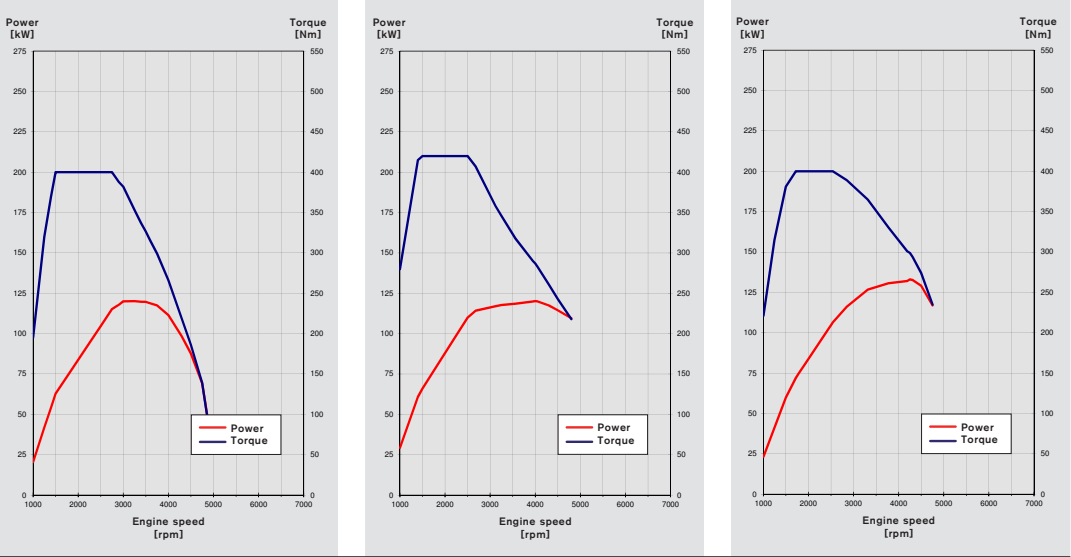




Manual gearbox/final drive	M66D	3.770			M66F FD	3.770	
Automatic gearbox/final drive	AW TF-80SC	3.075		AW TF-80SC	3.329	AW TG-81SC	2.666
PERFORMANCE							
Gearbox	Manual	Automatic		Automatic		Manual	Automatic
Acceleration, 0–100 km/h (sec)	9.9	9.9		10.8		8.6	8.6
Top speed, km/h	210	205		205		220	220
Fuel consumption l/100 km (Combined)	4.5	6.0/5.1** (4.9***)		6.2		4.3 (4.2*)	4.5 (4.5*)
CO ₂ g/km	119	159/134** (130***)		164		113 (109*)	119 (117*)

* Restricted offer ** With start/stop
*** With start/stop & restricted offer

* Restricted offer

ENGINES	D4 AWD (D5244T12)	D5 (D5244T11)	D5 (D5244T15)
Type	In-line 5-cyl. turbo diesel	In-line 5-cyl. turbo diesel	In-line 5-cyl. turbo diesel
Configuration	Transverse, all wheel drive	Transverse, front wheel drive	Transverse, front and all wheel drive
Displacement, cm ³	2400	2400	2400
Bore (mm)	81.0	81.0	81.0
Stroke (mm)	93.2	93.15	93.15
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	16.5:1	16.5:1	16.5:1
Valves, no/cylinder	4	4	4
Camshafts	2	2	2
Engine management system	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection
Ignition sequence	1 - 2 - 4 - 5 - 3	1 - 2 - 4 - 5 - 3	1 - 2 - 4 - 5 - 3
Engine idling speed, rpm	700	740	700
Fuel, rec. octane	Cetane Number: Min 48	Cetane Number: Min 48	Cetane Number: Min 48
Max output, kW (hp)/rpm	133 (181)/4000	158 (215)/4000	158 (215)/4000
Max torque, Nm/rpm	420/1500–2500	420/1500–3250	440/1500–3000

POWER AND TORQUE →

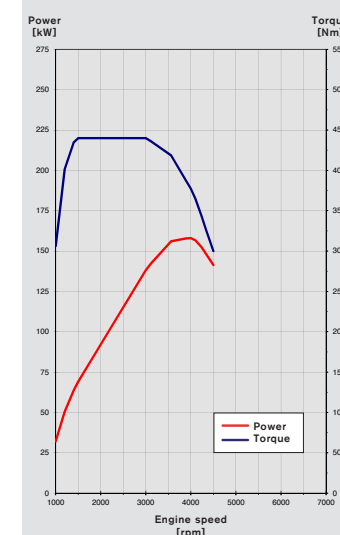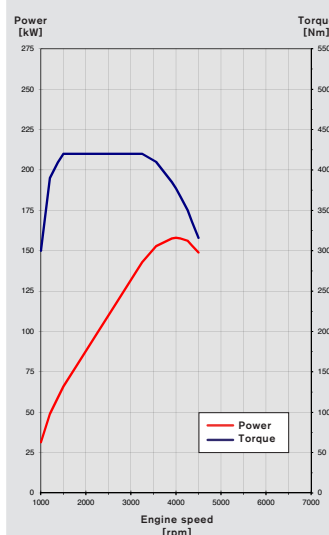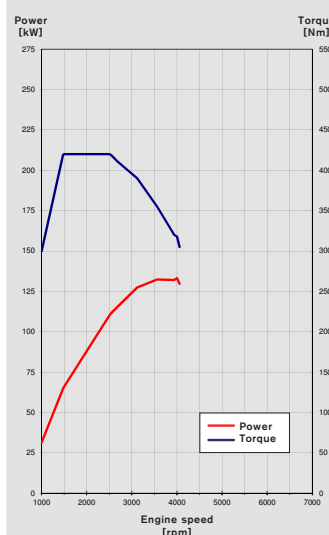

Manual gearbox/final drive		M66D F2A	3.770	
Automatic gearbox/final drive	AW TF-80SC	3.329		AW TF-80SC FWD/AWD 3.200/3.329
PERFORMANCE				
Gearbox		Automatic	Manual	Automatic FWD Automatic AWD
Acceleration, 0–100 km/h (sec)		9.4	7.8	8.0 8.0
Top speed, km/h		210	225	220 220
Fuel consumption l/100 km (Combined)		6.2	4.8	6.2 6.2
CO ₂ g/km		164	126	164 164

MEASUREMENTS AND VOLUMES

EXTERIOR MEASUREMENTS (CM)	
Length	481.4
Width (without mirrors)	186.1
Height (including shark fin)	154.7
Wheelbase	281.6
Track, front, (16"50 & 17"50/17"55 & 18"55)	158.8/157.8
Track, rear, (16"50 & 17"50/17"55 & 18"55)	158.6/157.6
Ground clearance, Std/Low sport & D2	15.1/13.1

WEIGHTS/MISCELLANEOUS	
Curb weight, kg (min-max, depending on setup)	1704-1909
Fuel tank, l	70
Max. trailer weight, kg	1300-2000
Max roof load, kg	100
Drag coefficient, Cd	0.31

INTERIOR MEASUREMENTS (CM)	
Headroom without sunroof (front/rear)	98.5/98.1
Headroom with sunroof (front/rear)	95.9/97.7
Headroom with sunroof (front/rear)	95.9/97.7
Headroom maximum, without sunroof (front)	101.0
Passenger compartment width at shoulder height (front/rear)	145.7/143.4
Leg room (front/rear)	106.4/88.0
Cargo volume, including under floor storage (ISO V211)	575
Cargo length from the first seatback to the tailgate measured at: - the height of the floor covering	187.8
Cargo length from the second seatback to the tailgate measured at: - the height of the floor covering	108.9
Cargo height (rear wheel center and car center line)	80.1
Rear opening height (car center line)	72.4
Width of luggage compartment between wheelhouses	113.0

