## Volvo V60 Cross Country

ENGINES	
Туре	
Configuration	
Displacement, cm <sup>3</sup>	
Bore (mm)	
Stroke (mm)	
Engine cylinder block material	
Cylinderhead material	
Compression ratio	
Valves, no/cylinder	
Camshafts	
Engine management system	
Ignition sequence	
Engine idling speed, rpm	
Fuel, rec. octane	
Max output, kW (hp)/rpm	
Max torque, Nm/rpm	

## T5 & T5 AWD (B4204T11) In-line 4-cyl. turbo petrol Transverse, front & all wheel drive 1969 82.0 93.2 Aluminium Aluminium 10.8:1 4 2 Gasoline direct injection 1 - 3 - 4 - 2 875 ±100 Min 91RON 180 (245)/5500

350/1500-4800

# 

-	
AW TG-81SC	3.075/3.329
Automatic (FWD)	Automatic (AWD)
6.6	6.8
210	210
6.6	7.4
153	168

### POWER AND TORQUE →

Manual gearbox/final drive
Automatic gearbox/final drive
PERFORMANCE
Gearbox
Acceleration, 0-100 km/h (sec)
Top speed, km/h
Fuel consumption I/100 km (combined)
CO <sub>2</sub> g/km

### TRANSMISSIONS

6-speed manual gearbox

6-speed automatic transmission

8-speed automatic transmission

RATIO	M66F	AW TF -80SD	AW TG -81SC
First	3.583	4.148	5.250
Second	2.050	2.370	3.029
Third	1.267	1.556	1.950
Fourth	0.838	1.155	1.457
Fifth	0.617	0.859	1.221
Sixth	0.510	0.686	1.000
Seventh	-	-	0.809
Eighth	-	-	0.673
Reverse	2.833	3.394	4.015

### ENCINE

Camshafts

ENGINES
Туре
Configuration
Displacement, cm <sup>3</sup>
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder

Ignition sequence
Engine idling speed, rpm
Fuel, rec. octane
Max output, kW (hp)/rpm
Max torque, Nm/rpm

Engine management system


D3 (D4204T4)
In-line 4-cyl. turbo diesel
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
15.8:1
4
2
Electronically controlled
common rail direct injection
1 - 3 - 4 - 2
825
Cetane Number: Min 48*
110 (150)/4250
350/1500-2500

Power [kW]					Т	orque [Nm]
275						550
250						500
225						450
200						400
175						- 350
150						300
125						- 250
100			1			200
75						150
50				Power Forque		- 100
25						- 50
1000 2	000 30	000 40	100 50	000 600	00 70	0
		Engir [	ne speed rpm]			
M66F			4.2	67		

AW TG-81SC	2.839
Manual	Automatic
9.1	9.1
205	205
4.2 (4.2**)	4.6
111 (110**)	120

\* Maximum biodiesel (RME) content 7%
\*\* Restricted offer

D4 (D4204T14)
In-line 4-cyl. twin turbo diesel
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
15.8:1
4
2
Electronically controlled
common rail direct injection
1 - 3 - 4 - 2
825
Cetane Number: Min 48*
140 (190)/4250

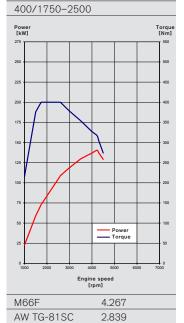

Manual	Automatic
7.8	7.8
210	210
4.2 (4.2**)	4.6
111 (110**)	120

\* Maximum biodiesel (RME) content 7% \*\* Restricted offer

D4	ΑV	۷D	(D	5244T	21)
ln-li	ne	5-с	yl.	twin	turb

in-line 5-cyl. twin turbo dieser
Transverse, all wheel drive
0.400

81.0	2400	
	81.0	

93.2 Aluminium

Aluminium

16.5:1

2


Electronically controlled common rail direct injection

1 - 2 - 4 - 5 - 3

700

Cetane Number: Min 48\* 140 (190)/4000

420/1500-3000

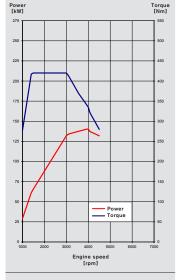

AW TG-81SD	3.329
	Automatic
	8.9
	205
	5.7
	149

\* Maximum biodiesel (RME) content 7%

## POWER AND TORQUE →


Manual gearbox/final drive
Automatic gearbox/final drive
PERFORMANCE
Gearbox
Acceleration, 0-100 km/h (sec)
Top speed, km/h
Fuel consumption I/100 km (combined)
CO <sub>2</sub> g/km


### $\rightarrow$


### MEASUREMENTS AND VOLUMES


EXTERIOR MEASUREMENTS (CM)	
Length	463.7
Widht (body width)	182.5
Width (incl mirrors outer edge)	209.7
Height (including shark fin antenna)	154.5
Wheelbase	277.4
Track, front, (tire (width): 215/235)	161.9/160.9
Track, rear, (tire (width): 215/235)	157.7/156.7
Ground clearance	20.1
WEIGHTS/MISCELLANEOUS	
Weight, kg (min-max, depending on setup)	1727 - 1821
Fuel tank, I	67.5
Max. trailer weight, kg (depending on setup)	1600 - 1900
Max roof load, kg	75
Drag coefficient, Cd	0.34

INTERIOR MEASUREMENTS (CM)	
Headroom without sunroof (front/rear row)	97.3/95.4
Headroom with sunroof (front/rear row)	95.5/95.4
Headroom maximum, without sunoof (front)	99.9
Headroom maximum, with sunroof (front)	98.4
Passenger comp width at shoulder height (front/rear row)	144.7/140.2
Leg room (front/rear row)	106.4/85.0
Cargo volume, including under floor storage (ISO V214) (litres)	1241
Cargo length from the first seatback to the tailgate measured at:	
- the height of the floor covering	174.9
Cargo length from the second seatback to the tailgate measured	at:
- the height of the floor covering	97.8
Cargo height (rear wheel center and car center line)	74.2
Rear opening height (car center line)	65.8
Width of luggage compartment between wheelhouses	

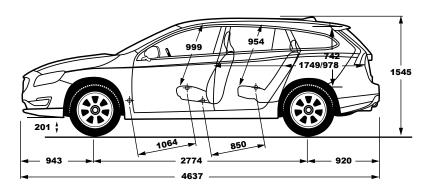



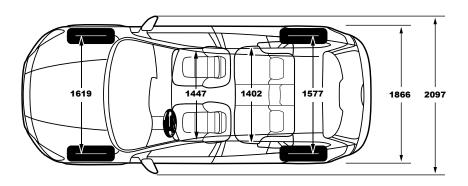



Suspension	front	McPherson Strut, Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
	rear	Trailing arm with Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
Steering		Power Assisted Rack and Pinion Steering
Turning circle, (curb to curb)		11.4 m
Braking system		Antilock Braking System (ABS) with Electronic Brake Distribution (EBD)
		and Brake Assistance (BA) + Hill Descent Control (HDC)
Braking distance, 100-0 km/h		37 m
Brake disc diameter	front	316 mm
	rear	302 mm